




Soundproofing America Online Store Your #1 Soundproofing Source Worldwide

Toll Free Line: 877-530-0139

West Coast Number: 760-510-9189

East Coast Number: 347-328-0501

Fax: 760-571-5007

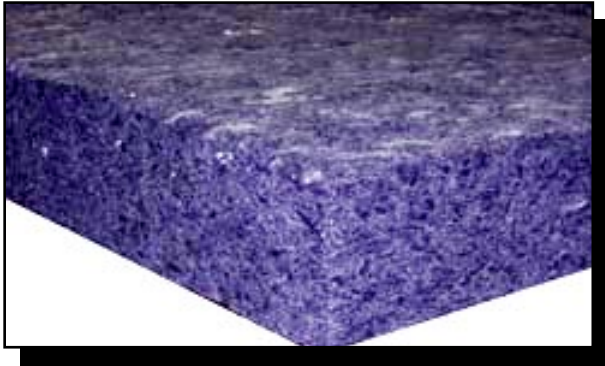

Bassoak Traps

**Low Frequency Sound
Absorber/Insulator**

- *Low Frequency High Performance*
- *Durable*
- *User Friendly*
- *Fiberglass Free*

MATERIAL: 1.2 lb. density, recycled bonded acoustical cotton fiber.

PATTERN: Soft gray. Ideal behind acoustical fabric, perforated or slotted panel surfaces.

FEATURES: Exceptionally good low frequency absorption.

APPLICATIONS: Industrial, architectural or pro audio applications machinery and mechanical rooms. For harsh noisy environments that require high performance low frequency noise reduction. Above acoustical ceiling grid systems. User friendly alternative to glass fiber insulations.

THICKNESS: 4" **SIZES:** 2' x 4' (Special sizes available upon request based on min. quantities).

COLOR: Gray

FLAMMABILITY: ASTM E-84 Class 1-A, Nonflammable. Flame Spread Index = 5, Smoked Developed Value = 35.

INSTALLATION: Adhesive, mechanical clips, friction fit.

Bassoak Traps: Sound Absorption - ASTM C423-90A

Frequency	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
4"	0.97	1.37	1.23	1.05	1.00	1.01	1.15

