



Soundproofing America Online Store
Your #1 Soundproofing Source Worldwide

Toll Free Line: 877-530-0139

West Coast Number: 760-510-9189

East Coast Number: 347-328-0501

Fax: 760-571-5007

GreenSound™ INSULATION



Safe For You & The Environment

GreenSound™ Natural Cotton Fiber Insulation consists almost entirely of natural denim and cotton fibers that are 100% recyclable, reducing landfill waste. The denim and cotton are also 100% post-industrial, which assures that the fibers are free of any contaminants. GreenSound requires a minimal amount of energy to manufacture aiding the environment with energy conservation and reduction in pollution. Fiberglass manufacturing consumes considerably more energy and creates more pollution, while not breaking down or decomposing in landfills.

GreenSound contains no chemical irritants and requires no warning labels compared to the carcinogenic warnings that fiberglass is required by law to display. GreenSound contains no harmful airborne particles that can get into HVAC systems and the surrounding environment causing health concerns. GreenSound also has no VOC outgassing concerns and contains no formaldehyde unlike fiberglass insulation. By installing GreenSound, you are making both your building and the environment a safer place to live, work, and enjoy.




Class A Material



SGS U.S. Testing Company Inc.
 ASTM E-84, Flame Spread Index
 Flame Spread Index = 5
 Smoked Developed Value = 35

Product	R-Value	Length	Width	Pieces/Bundle	Sq. Ft. Bundle	Bundle Cube	Bundle Weight
GS 1613	R-13	94"	16.50"	10	108	17	32 lbs.
GS 2413	R-13	94"	24.50"	8	128	17	38 lbs.
GS 1619	R-19	94"	16.50"	5	54	17	31 lbs.
GS 2419	R-19	94"	24.50"	4	64	17	36 lbs.

**GreenSound Natural Fiber Insulation (Thickness 4")
 Type A Mounting, AS-SA1949; NRC 1.15**

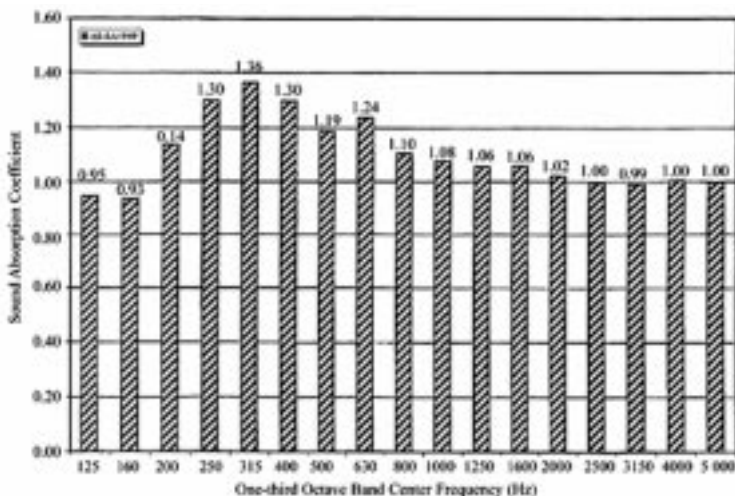

GreenSound: Sound Transmission Loss - ASTM E90							
Frequency	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
4"	0.97	1.37	1.23	1.05	1.00	1.01	1.15