




## Soundproofing America Online Store Your #1 Soundproofing Source Worldwide

**Toll Free Line: 877-530-0139**

**West Coast Number: 760-510-9189**

**East Coast Number: 347-328-0501**

**Fax: 760-571-5007**

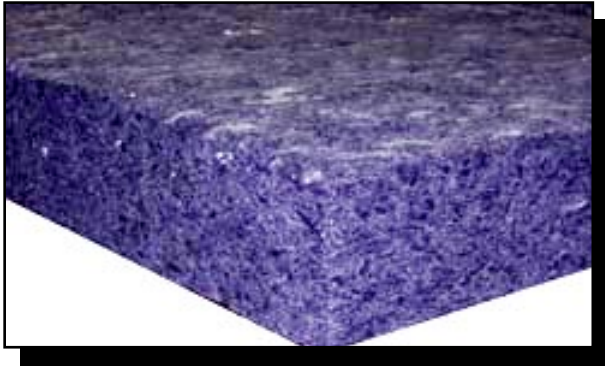

### Bassoak Traps

**Low Frequency Sound  
Absorber/Insulator**

- *Low Frequency High Performance*
- *Durable*
- *User Friendly*
- *Fiberglass Free*

**MATERIAL:** 1.2 lb. density, recycled bonded acoustical cotton fiber.

**PATTERN:** Soft gray. Ideal behind acoustical fabric, perforated or slotted panel surfaces.

**FEATURES:** Exceptionally good low frequency absorption.

**APPLICATIONS:** Industrial, architectural or pro audio applications machinery and mechanical rooms. For harsh noisy environments that require high performance low frequency noise reduction. Above acoustical ceiling grid systems. User friendly alternative to glass fiber insulations.

**THICKNESS:** 4" **SIZES:** 2' x 4' (Special sizes available upon request based on min. quantities).

**COLOR:** Gray

**FLAMMABILITY:** ASTM E-84 Class 1-A, Nonflammable. Flame Spread Index = 5, Smoked Developed Value = 35.

**INSTALLATION:** Adhesive, mechanical clips, friction fit.

**Bassoak Traps: Sound Absorption - ASTM C423-90A**

Frequency	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
4"	0.97	1.37	1.23	1.05	1.00	1.01	1.15

