




Soundproofing America Online Store **“Soundproofing From Coast to Coast”**

Toll Free Line: 877-530-0139

West Coast Number: 760-510-9189

East Coast Number: 347-328-0501

Fax: 760-571-5007

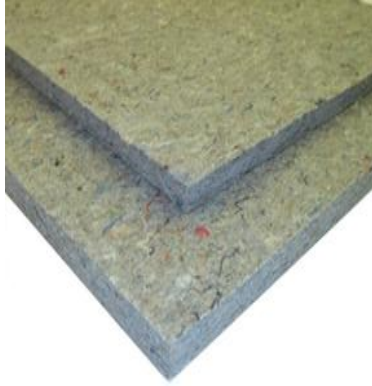

Give us a call to help you determine FibraBoard Panel is the right product for your particular use. We are here to assist, please call:
(877) 530-0139

FibraBoard Panel™ **SOUNDPROOFING BACKER**

- **Economical**
- **Recycled “Green” Product**
- **100% Pre-Consumer Recycled Synthetic Fiber**
- **Tackable**
- **Easy to Install**

MATERIAL: 100% pre-consumer recycled synthetic fiber.

FEATURES: Can contribute to LEED MRc4.1-4.2 credits.

APPLICATIONS: Soundproof backer for acoustical wall track, flooring underlayment, use behind drywall and other applications.

THICKNESS: 1/2” thick.

SIZES: 2’x4’ or 4’x8’ panels.

WEIGHT: 4000gm/ sq m (120oz/sq yd). Approx .8 lbs/sq ft
4’x8’ sheets= approx. 25 lbs.....68 sheets/pallet=1700 lbs...12 pallets/truck

2’x4’ sheets=approx.. 6.25 lbs...272 sheets/pallet=1700 lbs...24 pallets/truck

DENSITY: 20 lbs/cubic foot

FLAMMABILITY: Meets or exceeds the ASTM E-84-07 parameters for ‘Class A’ Interior Wall & Ceiling Finish Category.

VOC: Certified SCS Indoor Advantage-Gold. Passed Section 01350 VOC test to comply with Collaborative High Performance Schools (CHPS) and Office Spaces.

SOUND:

Impact Insulation Class (IIC) =20

Sound Transmission Class (STC) =15

Noise Reduction Coefficient (NRC) =.50

Sound Absorption Average (SAA) = 0.49

INSTALLATION: Acoustical Adhesive