



## Soundproofing America Online Store Your #1 Soundproofing Source Worldwide

Toll Free Line: **800-823-6817**

West Coast Number: **760-888-7515**

East Coast Number: **347-328-0501**




## AMERICAN SOUND BLANKETS™

Absorptive/Noise Barrier Quilted Curtains

- **For Unusual Conditions**
- **Cost Effective**
- **Water & Chemical Resistant**
- **Exterior Applications**

- MATERIAL:** Foam or fiberglass core, faced with quilted aluminized fabric.
- PATTERN:** Quilted pattern.
- FEATURES:** Effective and durable absorber with mass loaded vinyl barrier option.
- APPLICATIONS:** Effective solution to a wide range of noise control problems. Machinery and work area enclosures.
- THICKNESS:** 1" & 2" **NOM. SIZE:** 48" – 54" wide; Lengths up to 25'– Custom sizes available.
- COLOR:** Silver (Other colors available upon request).
- FLAMMABILITY:** ASTM E-84, Class A. Flame Spread: 23, Smoke Developed: 30.
- INSTALLATION:** Hook and loop fasteners, grommet hangers, curtain support hardware.

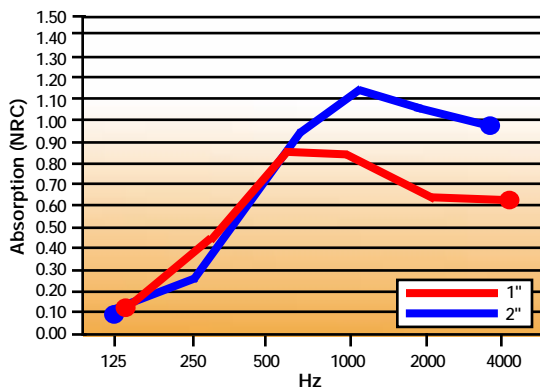

AMERICAN SOUND BLANKETS Sound Absorption Coefficients – C423							
Frequency	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	NRC
1" Thick w/oBarrier	.12	.47	.85	.84	.64	.62	.70
2" Thick w/oBarrier	.19	.99	.96	.80	.57	.33	.85
1" Thick w/Barrier	.12	.47	.85	.84	.64	.62	.70
2" Thick w/Barrier	.19	.99	.96	.80	.57	.33	.85

AMERICAN SOUND BLANKETS Sound Transmission Loss - ASTM E90							
Frequency	125Hz	250Hz	500Hz	1KHz	2KHz	4KHz	STC
1" Thick w/Barrier	11	16	24	30	35	35	27
2" Thick w/Barrier	13	20	29	40	50	55	32